





Product # 1114-1701



**COLLECTION | MOSAIC FLOORS**  
**COLOR | NATURAL**  
 Wood species | Oak  
 Grade | Select & Better  
 Pattern | Versailles  
 Constructions | 2-layer T&G  
 Size | 19,05 x 635 x 635 mm (¾" x 25" x 25")  
 Finish | Hardwax Oil Combi

## CONSTRUCTION : 2-LAYER T&G

DIMENSIONS :	
Thickness	19,05 mm (¾")
Width	635 mm (25")
Length	635 mm (25")
Average length	-
Microbevel	1,0 mm
Joint type	tongue and groove (T&G)

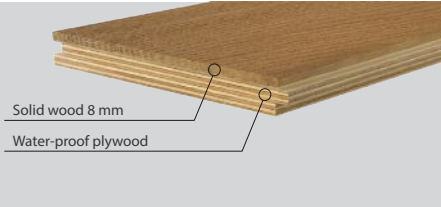

PACKAGING :	BOX	PALLET
Content:	1,61 m <sup>2</sup>	27 (43,47 m <sup>2</sup> )
Weight	21 kg	602 kg
H x W x L	85 x 648 x 660 mm	900 x 680 x 1960 mm
Content:	17,4 sq.ft.	469,8 sq.ft.
Weight	49 lb	1332 lb
H x W x L	3" x 26" x 26"	35" x 27" x 77"

## DEVIATIONS :

Deviation on Thickness	± 0,2 mm	
Deviation on Width	± 0,3 mm	EN 13489
Height Difference	≤ 0,04 % of width	ГОСТ 862.3
Cup	≤ 0,2 % of plank width	СТБ 2121
Bow	-	EN 13489
Spring	≤ 0,5 % of length	

## CHARACTERISTICS :

Fire resistance	Dfl-s1	
Formaldehyde emission class	E1	
Pentachlorophenol content	None	EN 14342
Thermal resistance	0,128 m <sup>2</sup> ·K/W	
Thermal conductivity	0,148 W/(m·K)	
Structural warranty	Lifetime	

## INSTALLATION :



Glue down over concrete, plywood or wooden subfloor or nail down over wooden subfloor.  
 Applicable above, on and below ground level.

## STORAGE AND USAGE :



— Air humidity 40% – 65%  
 — Temperature +18 °C – +22 °C

## FINISH : HARDWAX OIL COMBI

DESCRIPTION :	
Type of coating	UV-cured modified polyurethane-acrylate, organic oils and waxes, oxidative
Surface (finish) type	Semi-closed pores, wire brushed
Sheen	Silk matte 6 - 12 GU/85°
Finish warranty	-

## CLASSIFICATION SURFACE CHARACTERISTICS :

Wear resistance	Not rated	EN 438-2
Scratch resistance	Not rated	EN 438
Slip resistance	50 (SRV dry)	EN 15676
Resistance to chemical agents	Class 5 (Except blue ink)	EN 13442
Repairability	High	

## MAINTENANCE AND CARE CONDITIONS :

Maintenance of hardwood floors with Hardwax Oil Combi finish assumes regular (daily if necessary) cleaning from dust and grit using a vacuum, followed by a thorough cleaning with Coswick Hardwood Floor Cleaner or other similar product. Floor surface areas that receive the most traffic and get worn down quicker, such as areas by the front door, hallways, kitchens etc., should be periodically renewed with special Coswick Restorative Oil. This product restores the protective surface film. Frequency of use depends on type of interior and intensity of foot traffic. For residential interiors, restorative cleaning should be done once in 3-5 years; for public and commercial interiors with intense foot traffic, it is recommended to use the product 2-4 times a year.

## GRADE : SELECT & BETTER

DESCRIPTION :		DESCRIPTION :	
Sound sapwood	Permitted to 25% of the plank area	Bark pocket	Permitted up to 10 mm in length, up to 3 mm in width, filled
Colour variation	Permitted slight colour variation	Pith	Permitted healthy heart
Knot	Permitted up to 10 mm, filled	Slope of grain	Permitted
Checks	Not permitted	Medullary ray	Permitted